VISION
HOLLOW METAL LIMITED

MAS SERIES FRAMES
MASONRY

KDF -24

MAS SERIES FRAME STANDARDS

Knock Down (K.D.) corner connection.

Galvanneal steel.

ASA (4 7/8") strike reinforcement with closed back.

Silencer holes.

4 1/2" high frequency hinge reinforcement with conversion dimples to accomodate for heavy weight hinges.

Factory embossed fire rating on hinge jamb

Floor anchor.

FRAME PROFILE

JAMB DEPTH

1 7/8" — VARIES — 1 1/2"

5/8"

2"

THROAT

1/2"   1/2"
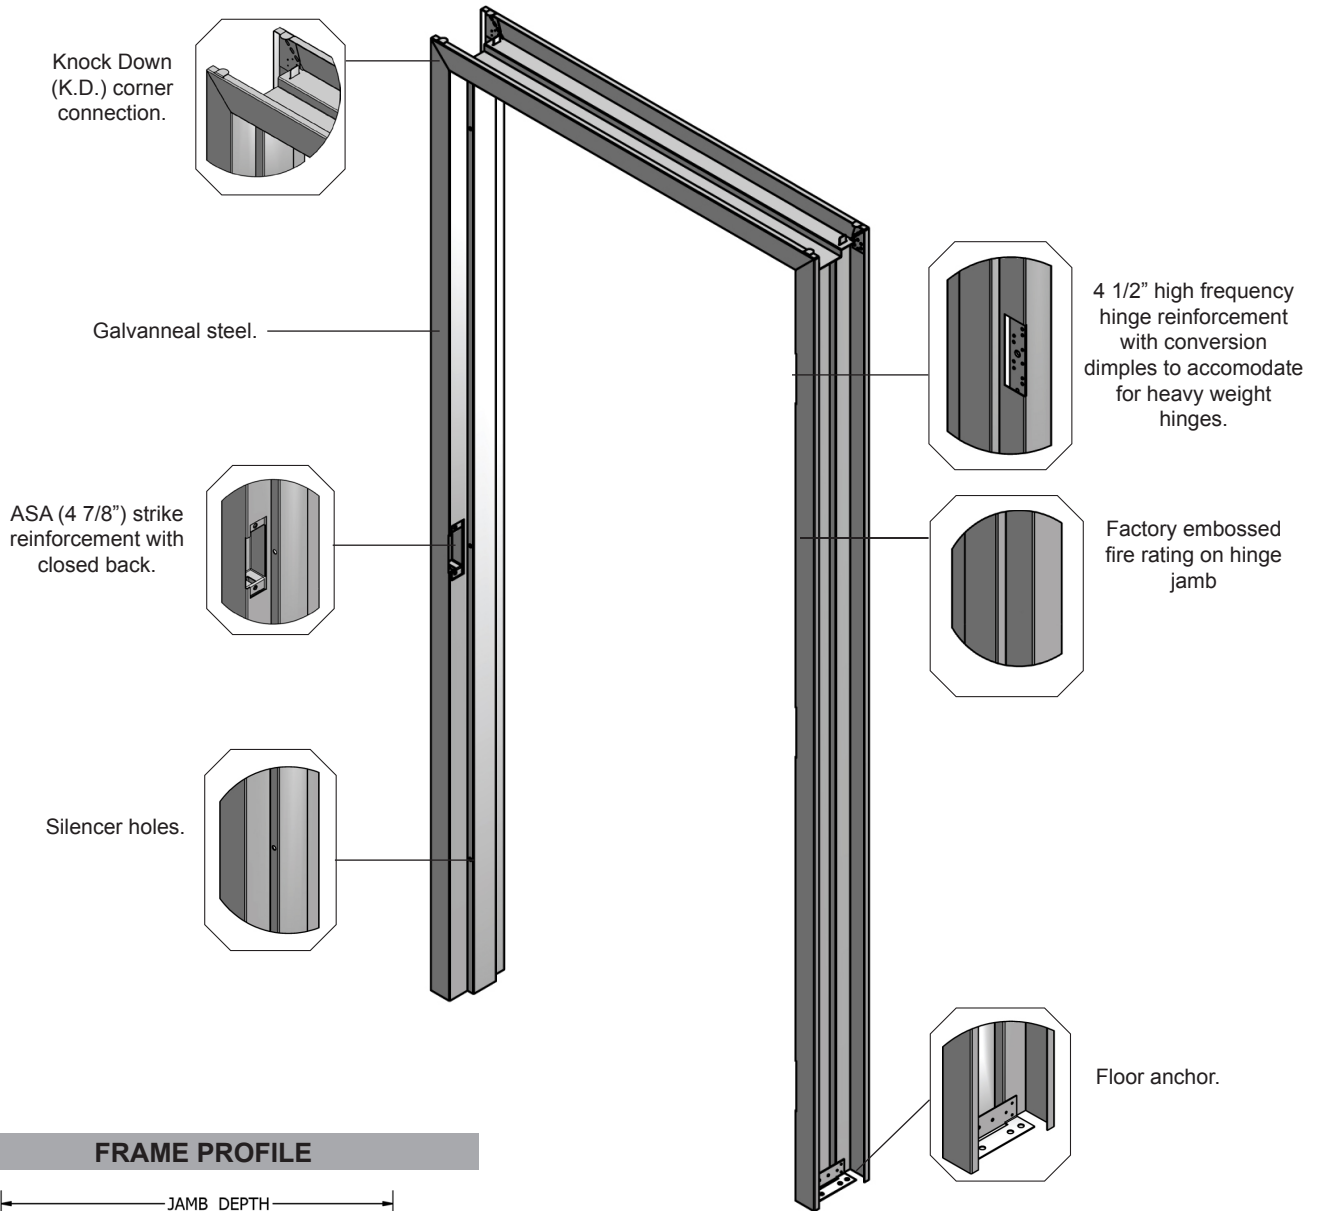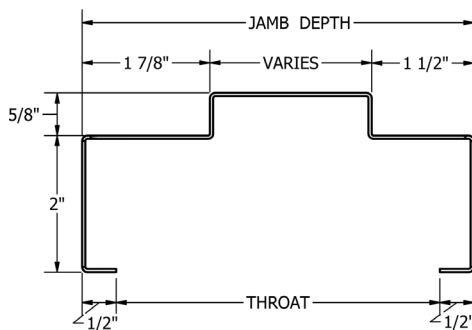
ADDITIONAL CUSTOM FRAME OPTIONS ARE AVAILABLE