



04.220

BOTTOM RAIL & ROLL-UP DOOR BOLTS

SECURITY PRODUCTS



MORTISE BOTTOM RAIL DEADBOLT



- Solid brass lock for bottom rail on glass door
- Lock accepts standard 1 5/32" (29.4 mm) diameter mortise cylinder with cam B (Yale type)
- 5/8" (16 mm) diameter bolt x 19/32" (15 mm) throw
- 1/4" x 2" (51 mm) long flat head mounting screws are required

MODEL NUMBER	A (backset)	B	C	D	E	F	G	H	I	J	PER CASE	WEIGHT LBS / KG
3505	27/32 (21.4)	4 5/32 (105.3)	3 1/2 (89.0)	1 9/16 (39.6)	5/8 (16.0)	1 7/16 (36.6)	1 1/2 (38.0)	1 11/32 (34.2)	5/8 (15.7)	1 5/16 (33.1)	50	40.5 / 18.4

TWO-POINT DEADLOCK

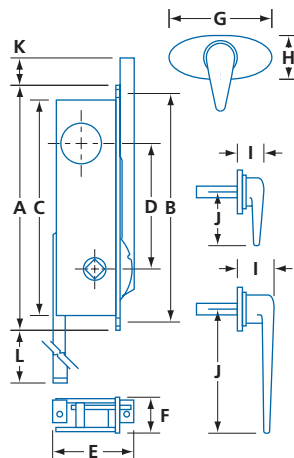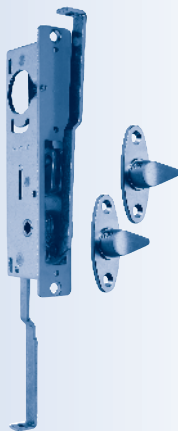

- High security two-point deadlock for use on roll-up doors / grills
- Top and bottom locking for sliding or swinging door
- Lock accepts standard 1 5/32" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Cylinder backset of 1 11/16" (42.9 mm)
- Heavy zinc plated steel case
- 1" (25.4 mm) top and bottom bolt throw
- Includes two zinc alloy lever handles with steel spindle in stainless steel finish

MODEL NUMBER	A	B	C	D	E	F	G	H	I	J	K	L	PER CASE	WEIGHT LBS / KG
2954TH03	6 27/32 (173.7)	6 3/8 (162.1)	6 (152.8)	3 1/2 (89.0)	2 5/8 (66.8)	1 (25.4)	2 7/8 (72.9)	1 7/32 (31.0)	3/4 (18.8)	1 1/2 (38.1)	13/32 (10.3)	3 3/4 (95.2)	25	42.5 / 19.3
2954TH04									1 1/32 (26.0)	3 15/32 (88.0)				



Dimensions unless specified otherwise are: Inches (Millimeters)

04.221

DOREX HANDLES

SECURITY PRODUCTS



DOREX® LEVER HANDLE

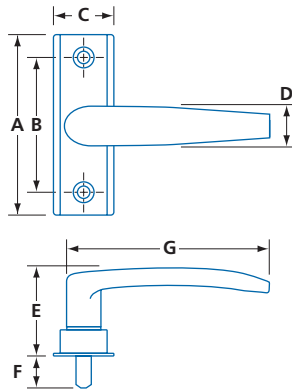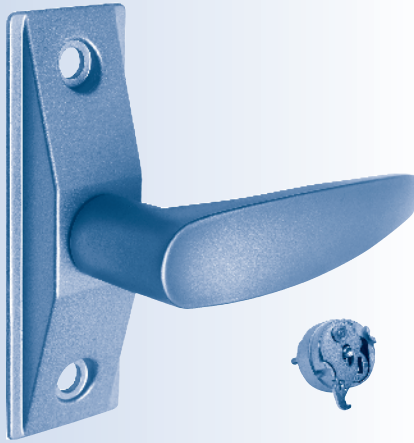

- Lever handle with cam plug for DL2000 series deadlatch, to be used on 1 3/4" (44 mm) thick aluminum doors
- Left hand or right hand, field reversible
- Sturdy and dependable aluminum alloy construction
- Hardened steel spindle and cam
- 3" (76.2 mm) center to center mounting holes
- Cam plug (0112PLUGLH / RH) included but also sold separately
- Finish: aluminum or duronodic

MODEL NUMBER	A	B	C	D	E	F	G	PER CASE	WEIGHT LBS / KG
0112	4 (101.5)	3 (76.0)	1 11/32 (34.0)	7/8 (22.4)	1 15/16 (48.8)	23/32 (18.0)	3 3/4 (95.1)	50	39.6 / 18.0

DOREX® PUSH / PULL PADDLE

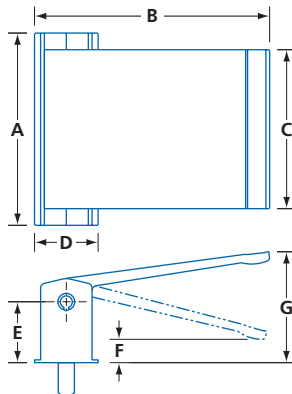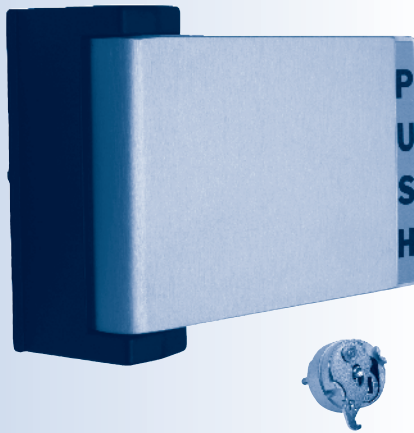

- PUSH / PULL paddle with cam plug for DL2000 series deadlatch
- Left hand or right hand, field reversible
- Zinc alloy base
- Extruded and anodized aluminum paddle
- 3" (76.2 mm) center to center concealed mounting holes
- Spring (5590S) and extension kit (5590SPK) for 2 1/4" (57.2 mm) door thickness are available
- Cam plug (0112PLUGLH / RH) included but also sold separately
- Finish: aluminum or duronodic

MODEL NUMBER	A	B	C	D	E	F	G	PER CASE	WEIGHT LBS / KG
5590	4 1/32 (102.8)	4 15/16 (125.7)	3 11/32 (85.0)	1 11/32 (34.0)	1 5/16 (33.0)	9/16 (14.0)	2 3/8 (60.0)	20	35.2 / 16.0

Dimensions unless specified otherwise are: Inches (Millimeters)