


MANUAL FLUSH EXTENSION BOLT


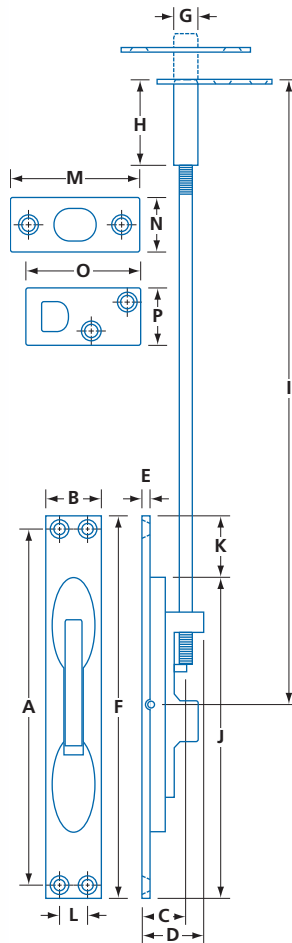


- Brass-aluminum construction material
- Throw: 3/4" (19mm)
- Adjustable rod up to 7/8" (22.2mm)
- Supplied with guide, strike plate and 1/4-20 UNC threaded rod and mounting hardware
- Optional rods available:  
 model #FBUL100R16 (nominal length 16" (406.4mm)), installed "I" dimension 18" (457.2mm)  
 model #FBUL100R22 (nominal length 22" (558.8mm)), installed "I" dimension 24" (609.6mm)
- cULus listed for use with hollow metal, metal clad, steel covered composite, flush type sheet or metal swinging type fire doors. Fits metal door preparation per ANSI A115.4-1981
- Finish: satin nickel and satin chrome

R1 07/08

MODEL NUMBER	FINISH	A	B	C BS	D	E	F	G	H	I	J	K	L	M	N	O	P	PER BOX	WEIGHT LBS / KG
FBUL100	C15, C26D	6 1/4 (158.8)	1 (25.4)	3/4 (19.1)	1 (25.4)	1/8 (3.2)	6 3/4 (171)	1/2 (12.7)	1 1/2 (38)	12 (305)	4 3/4 (120)	1 (25.4)	1/2 (12.7)	2 1/4 (57.1)	15/16 (23.8)	2 (50.8)	1 (25.4)	2	1.45 / 0.66

MANUAL FLUSH EXTENSION BOLT

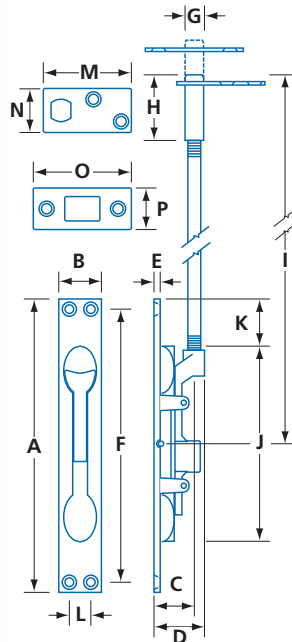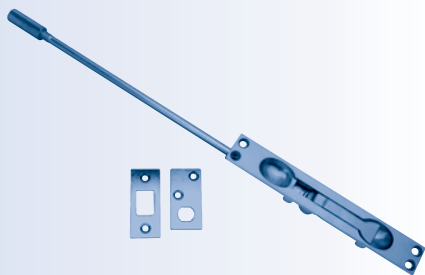

- Model #DC840 has a 5/8" (15.9mm) throw and +5/8" (15.9mm) adjustment
- Model #8402 has a 1/2" (12.7mm) throw and ±1/4" (6.4mm) adjustment
- Supplied with guide, strike plate and 5/16-18 UNC threaded rod and mounting hardware
- Fits metal door preparation per ANSI A115.4-1981
- Finish: model #DC840 is available in bright brass and satin nickel. Model #8402 is available in bright brass, antique brass, oil rubbed bronze and satin chrome

MODEL NUMBER	MATERIAL	FINISH	A	B	C BS	D	E	F	G DIA	H	I	J	K	L	M	N	O	P	PER BOX	WEIGHT LBS / KG
DC840	Zinc die-cast	C3, C15	6 1/4	1	3/4	1	9/64	6 3/4	7/16 (11.1)	1 1/2 (38)	12 (305)	4 3/4 (111)	1 (25.4)	1/2 (12.7)	2 (50.8)	1 (25.4)	2 1/4 (57)	15/16 (23.8)	2	1.27 / 0.58
8402		C3, C5, C10B, C26D	6 1/4 (158.8)	1 (25.4)	3/4 (19.1)	1 (25.4)	9/64 (3.6)	6 3/4 (171)	1/2 (12.7)	1 1/2 (38)	12 (305)	4 9/16 (116)	1 (25.4)	1/2 (12.7)	2 (50.8)	1 (25.4)	2 1/4 (57)	15/16 (23.8)		1.32 / 0.6